




Hilti HUS3-HCC SCREW ANCHOR



Technical Datasheet

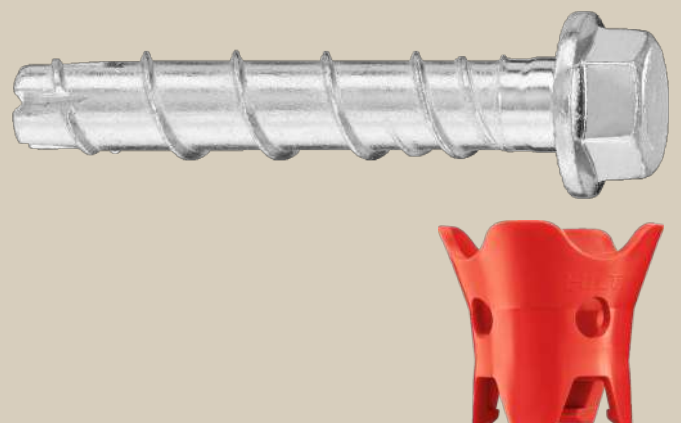






Update: Jul-20



HUS3 Screw anchor

Ultimate performance screw anchor for single point fastening

Anchor version	Benefits
  <p>HUS3-H (8, 10, 14)</p> <p>HUS3-H with HUS3-HCC 14 plastic cap (14)</p>	<ul style="list-style-type: none"> - High productivity - less drilling and fewer operations than with conventional anchors - ETA approval for concrete overlays - Small edge and spacing distance - Three embedment depths for maximum design flexibility - Immediate placement of the reinforcement - HUS3-HCC 14 plastic cap simplify placing of the rebar on the jobsite

Base material		Load conditions	
			
Concrete (non-cracked)	Concrete (cracked)	Static / quasi-static	
Installation conditions		Other information	Design Method
			
Small edge distance and spacing	European Technical Assessment	CE conformity	

Approvals / certificates

Description	Authority / Laboratory	No. / date of issue
European Technical Assessment	DIBt, Berlin	ETA-13/1038 / 22-07-2019

Setting instructions

